



## TA8025HSL-1

## TA8025HSL-2

### Features

Size: 80×80×25mm(3.15×3.15×1.0in)

Frame: Aluminum Painted&Plastic UL94V-0


Impeller: Reinforced Plastic UL94V-0

Bearings: Ball Bearing&Sleeve Bearing


Life Expectancy:50,000 Hours at 20°C-Ball  
30,000 Hours at 20°C-Sleeve

Approvals: CE

Weight:250g

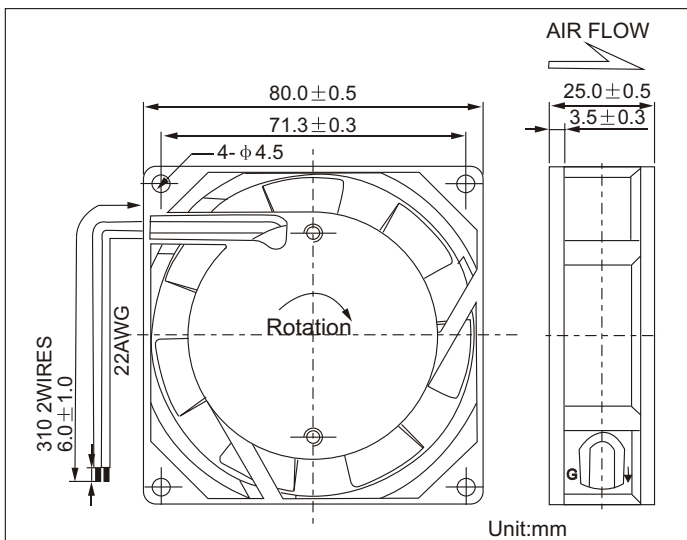

### Air Flow vs Air Pressure

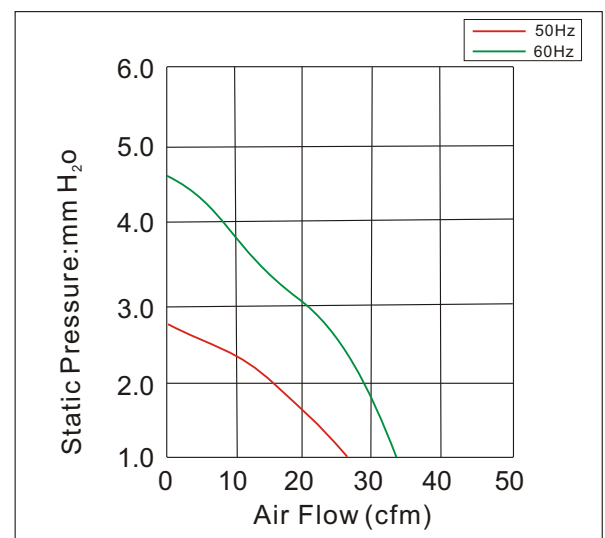

### Performance

Model	Part Number	Bearing System	Rated Voltage (V)	Operating Frequency (Hz)	Current (A)	Input Power (W)	Nominal Speed (R.P.M)	Air Flow (CFM)	Air Pressure (mm-H <sub>2</sub> O)	Noise (dBA)
TA8025	TA8025HSL-1 TA8025HBL-1	Sleeve or Ball	110/120	50/60	0.14/0.13	15/11	2300/2800	17/21	0.072/0.12	22/26.6
TA8025	TA8025HSL-2 TA8025HBL-2	Sleeve or Ball	220/240	50/60	0.08/0.07	16/11	2300/2800	17/21	0.072/0.12	22/26.6

Product specification contained herein maybe changed without prior notice

It is there fore advisable to contact CNDF before proceeding with the design of equipment incorporating this product

ZheJiang DongFang Electromechanical co.,ltd(CNDF)

Add:No.268,Wei 12 Road,Yueqing Central Industrial Park,Wenzhou City,Zhejiang Province,China

Mobile/Whatsapp/WeChat:+86-18858867961 Email:grace@cndf.net Skype:cndf.sales2 Website:www.cndf.net